


Quick-Fit® Thread Reducers

Nylon Reducers with large external thread and small internal thread

M → M

strong

FLEXIBLE PRODUCTION

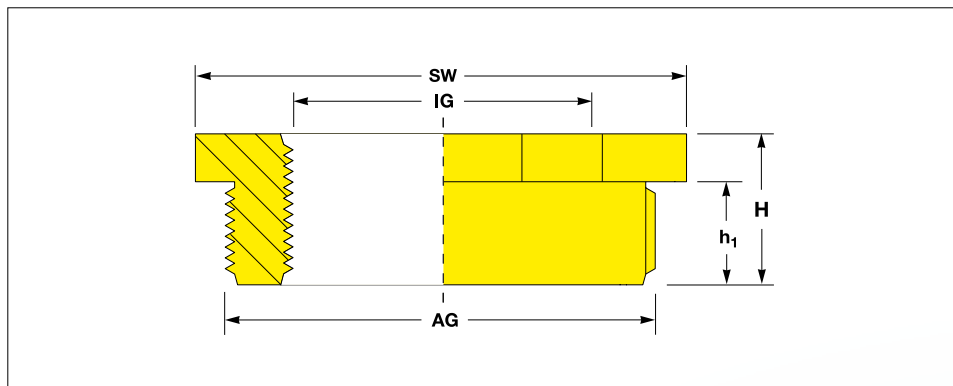

Metric

All dimensions in mm

from	to		
Thread external	Thread internal	Spanner size	Reference-No.
AG	IG	IG	
M 16	M 12	SW 24	EPN 550 / M 16 → M 12
M 20	M 12	SW 24	EPN 550 / M 20 → M 12
M 20	M 16	SW 24	EPN 550 / M 20 → M 16
M 25	M 12	SW 32	EPN 550 / M 25 → M 12
M 25	M 16	SW 29	EPN 550 / M 25 → M 16
M 25	M 20	SW 29	EPN 550 / M 25 → M 20
M 32	M 12	SW 36	EPN 550 / M 32 → M 12
M 32	M 16	SW 36	EPN 550 / M 32 → M 16
M 32	M 20	SW 36	EPN 550 / M 32 → M 20
M 32	M 25	SW 36	EPN 550 / M 32 → M 25
M 40	M 16	SW 46	EPN 550 / M 40 → M 16
M 40	M 20	SW 46	EPN 550 / M 40 → M 20
M 40	M 25	SW 46	EPN 550 / M 40 → M 25
M 40	M 32	SW 46	EPN 550 / M 40 → M 32
M 50	M 20	SW 55	EPN 550 / M 50 → M 20
M 50	M 25	SW 55	EPN 550 / M 50 → M 25
M 50	M 32	SW 55	EPN 550 / M 50 → M 32
M 50	M 40	SW 55	EPN 550 / M 50 → M 40
M 63	M 25	SW 68	EPN 550 / M 63 → M 25
M 63	M 32	SW 68	EPN 550 / M 63 → M 32
M 63	M 40	SW 68	EPN 550 / M 63 → M 40
M 63	M 50	SW 68	EPN 550 / M 63 → M 50

Material :
PA 6,
impact resistant nylon

Standard Colour :
light grey RAL 7035

Nylon Reducers with large external thread and small internal thread

Think Plastic. Go Protec.®



Should your requirements not be shown please ask for a separate quotation.
PROTEC products and specifications are subject to improvement and change without notice.

Quick-Fit® Thread Reducers

Nylon Reducers with large external thread and small internal thread

PG → PG

TRIPLE ADVANTAGE of PROTEC QUICK-FIT®

QUALITY. This component reduces the threaded entry diameter on any threaded connector from a larger to smaller thread size to accept a gland.

Configuration: from large external Metric to small Metric and from large external PG to small internal PG.

AVAILABILITY. With over 400 million moulded components shipped from our Oststeinbek / Hamburg logistics center we provide the fastest on time delivery service to all markets and industries.

PHILOSOPHY. The highest degree of Protec Quick-Fit functionality and safety at the best price in the market.



PG

from	to	All dimensions in mm	
Thread external	Thread internal	Spanner size	Reference-No.
AG	IG	IG	
PG 9	PG 7	SW 24	EPN 550 / PG 9 → PG 7
PG 11	PG 7	SW 22	EPN 550 / PG 11 → PG 7
PG 11	PG 9	SW 22	EPN 550 / PG 11 → PG 9
PG 13.5	PG 7	SW 24	EPN 550 / PG 13.5 → PG 7
PG 13.5	PG 9	SW 24	EPN 550 / PG 13.5 → PG 9
PG 13.5	PG 11	SW 27	EPN 550 / PG 13.5 → PG 11
PG 16	PG 9	SW 27	EPN 550 / PG 16 → PG 9
PG 16	PG 11	SW 27	EPN 550 / PG 16 → PG 11
PG 16	PG 13.5	SW 27	EPN 550 / PG 16 → PG 13.5
PG 21	PG 11	SW 32	EPN 550 / PG 21 → PG 11
PG 21	PG 13.5	SW 32	EPN 550 / PG 21 → PG 13.5
PG 21	PG 16	SW 32	EPN 550 / PG 21 → PG 16
PG 29	PG 13.5	SW 40	EPN 550 / PG 29 → PG 13.5
PG 29	PG 16	SW 40	EPN 550 / PG 29 → PG 16
PG 29	PG 21	SW 40	EPN 550 / PG 29 → PG 21
PG 36	PG 16	SW 60	EPN 550 / PG 36 → PG 16
PG 36	PG 21	SW 60	EPN 550 / PG 36 → PG 21
PG 36	PG 29	SW 50	EPN 550 / PG 36 → PG 29
PG 42	PG 21	SW 65	EPN 550 / PG 42 → PG 21
PG 42	PG 29	SW 65	EPN 550 / PG 42 → PG 29
PG 42	PG 36	SW 55	EPN 550 / PG 42 → PG 36
PG 48	PG 29	SW 70	EPN 550 / PG 48 → PG 29
PG 48	PG 36	SW 60	EPN 550 / PG 48 → PG 36
PG 48	PG 42	SW 70	EPN 550 / PG 48 → PG 42

Should your requirements not be shown please ask for a separate quotation.

PROTEC products and specifications are subject to improvement and change without notice.

Material :
PA 6,
impact resistant nylon

Standard Colour :
light grey RAL 7035

Individual Productions :
On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

Think Plastic. Go Protec.®

PROTEC
PLASTICS