


Quick-Fit® Cable Glands, Brass, Nickel plated

Easy-to-install. Integrated strain relief, built-in twisting protection, wide sealing and clamping range

EX STOCK
400m
Parts
DELIVERY SERVICE

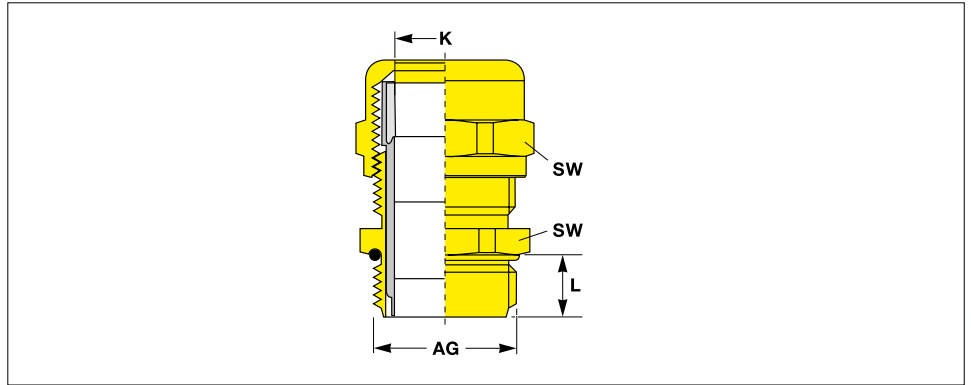

Metric

All dimensions in mm

Thread size	Clamping range	Length of thread	Spanner size	Reference-No.
AG	K	L	SW	
M 12 × 1.5	3.0 – 6.0	5.0	SW 14	EPN 700 / M 12 MS
M 16 × 1.5	5.0 – 9.0	5.0	SW 17	EPN 700 / M 16 MS
M 20 × 1.5	8.0 – 13.0	6.0	SW 22	EPN 700 / M 20 MS
M 25 × 1.5	11.0 – 16.0	7.0	SW 27	EPN 700 / M 25 MS
M 32 × 1.5	15.0 – 21.0	8.0	SW 34	EPN 700 / M 32 MS
M 40 × 1.5	19.0 – 27.0	8.0	SW 43	EPN 700 / M 40 MS
M 50 × 1.5	24.0 – 35.0	9.0	SW 55	EPN 700 / M 50 MS
M 63 × 1.5	34.0 – 44.0	10.0	SW 65	EPN 700 / M 63 MS

PG

All dimensions in mm

PG 7	3.0 – 6.0	5.0	SW 14	EPN 700 / PG 7 MS
PG 9	4.0 – 8.0	6.0	SW 17	EPN 700 / PG 9 MS
PG 11	5.0 – 10.0	6.3	SW 20	EPN 700 / PG 11 MS
PG 13.5	6.0 – 12.0	6.5	SW 22	EPN 700 / PG 13.5 MS
PG 16	10.0 – 14.0	6.8	SW 24	EPN 700 / PG 16 MS
PG 21	13.0 – 18.0	7.0	SW 30	EPN 700 / PG 21 MS
PG 29	16.0 – 25.0	8.0	SW 40	EPN 700 / PG 29 MS
PG 36	19.0 – 32.0	9.0	SW 50	EPN 700 / PG 36 MS
PG 42	28.0 – 38.0	10.0	SW 57	EPN 700 / PG 42 MS
PG 48	34.0 – 44.0	10.0	SW 64	EPN 700 / PG 48 MS

Material :
Brass,
nickel plated

Blade insert :
Polyamide PA6 V-2

Sealing ring :
Polychloroprene-Nitrile rubber
CR/NBR

O-Ring :
Nitrile rubber NBR

Protection grade :
IP68

Easy-to-install. Integrated strain relief, built-in twisting protection, wide sealing and clamping range

Think Plastic. Go Protec.®



Should your requirements not be shown please ask for separate quotation.
PROTEC products and specifications are subject to improvement and change without notice.

Quick-Fit® Cable Glands, Brass, Nickel plated

Easy-to-install. Integrated strain relief, built-in twisting protection, wide sealing and clamping range

TRIPLE ADVANTAGE of PROTEC QUICK-FIT®

QUALITY. A wide range of high strength compression type cable glands manufactured in nickel plated brass with either PG or metric thread.

Protection similar to IP 68 is achieved by employing a fully insulated Neoprene cable seal and Perbunan O-Ring on external fixing thread.

AVAILABILITY. With over 400 million moulded components shipped from our Oststeinbek / Hamburg logistics center we provide the fastest on time delivery service to all markets and industries.

PHILOSOPHY. The highest degree of Protec Quick-Fit functionality and safety at the best price in the market.



Material :
Brass,
nickel plated

Individual Productions :
On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

Think Plastic. Go Protec.®

PROTEC
PLASTICS